

ADJUSTABLE LANYARD WITH SHOCK ABSORBER

LENGTH: 10 M

GGALSA062

GROXX

TECHNICAL SPECIFICATION

Adjustable Lanyard with/ Shock Absorber is engineered to deliver dependable fall protection when working at height. Built around a flexible anchorage line, it allows smooth mobility while maintaining continuous safety. The system includes a durable kernmantle rope, integrated energy absorber, and high-strength connectors—making it suitable for a wide range of industrial and construction applications.

FEATURES

- Designed to support safe movement across both horizontal and vertical work areas
- Equipped with a 12 mm kernmantle rope integrated with an energy absorber for impact reduction
- Includes a rope grab and steel karabiner for quick and secure harness connection
- Compatible with various anchorage setups such as anchor points, static lines, and anchor slings
- Available in multiple lengths: 10 m, 20 m, 30 m, 50 m, 150 m, and 200 m
- Constructed from galvanized steel for durability
- Fixed (non-detachable) design with integrated shock-absorbing element
- Steel screw-lock karabiner ensures secure and reliable attachment

MATERIAL


- Rope Type: Kernmantle rope
- Rope Diameter: 12 mm

WEIGHT & HEIGHT

- 3.49 kg ± 0.05 kg

MINIMUM BREAKING STRENGTH

- Minimum Breaking Strength: 15 kN
- Minimum Span: 5 m
- Maximum Span: 10 m

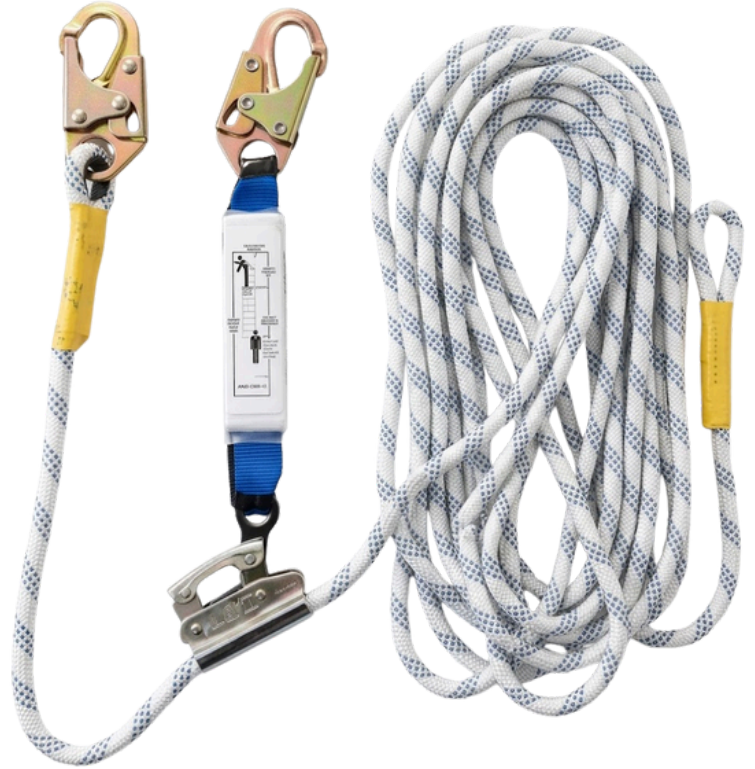

CE EN 353-2:2002

USED IN INDUSTRY

